

# Rolls



## FLOODED DEEP CYCLE BATTERY

## 6 FS L16-HC



Series	FS	Warranty	1 Year
Volts	6	BCI	903
Cells	3	Plates/Cell	17
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	828 Minutes
Reserve Capacity (RC @ 75A)	218 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
		105%	100%	75%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>489 AH</b>	<b>4.89 A</b>
@ 72 Hour Rate	<b>476 AH</b>	<b>6.61 A</b>
@ 50 Hour Rate	<b>459 AH</b>	<b>9.18 A</b>
@ 20 Hour Rate	<b>425 AH</b>	<b>21.25 A</b>
@ 15 Hour Rate	<b>400 AH</b>	<b>26.63 A</b>
@ 10 Hour Rate	<b>383 AH</b>	<b>38.25 A</b>
@ 8 Hour Rate	<b>366 AH</b>	<b>45.69 A</b>
@ 5 Hour Rate	<b>340 AH</b>	<b>68.0 A</b>
@ 1 Hour Rate	<b>200 AH</b>	<b>199.75 A</b>

Amphere hour capacity ratings based on specific gravity of 1.280 at 25°C (77°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	55.5 kg	122.5 lbs
Length	31.8 cm	12.5"
Width	18.1 cm	7.13"
Height Inc. Term.	42.55 cm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

### Cycle Life vs. Depth of Discharge

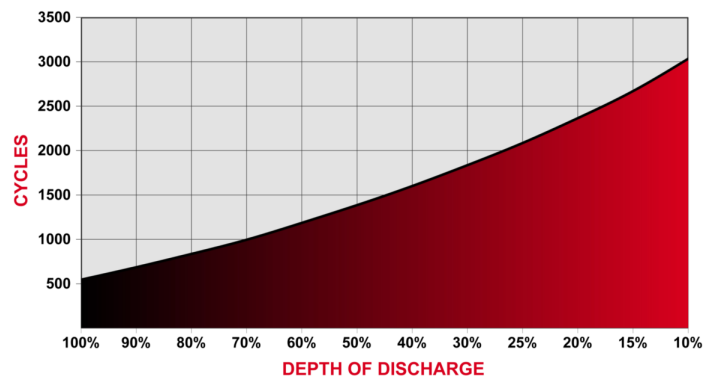

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

