



Series	AGM-R	Warranty	See Warranty Terms
Volts	12	BCI	
Terminal Type	F9(M8)		
Included Hardware	M8 stainless bolts & washers		
Size & Thread	M8		

### Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	30 A
Maximum Charge Current	45 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5 mΩ

### Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	<b>159 AH</b>	<b>7.95 A</b>
@ 10 Hour Rate	<b>150 AH</b>	<b>15 A</b>
@ 5 Hour Rate	<b>128 AH</b>	<b>25.6 A</b>

Cut Off Voltage	Constant Current Discharge						
1.8 VPC	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
	79.3	47.6	37.5	29.8	25.5	17.9	15


### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	43.5 kg	96 lbs
	Length	56.5 cm	22.2"
	Width	11.0 cm	4.33"
	Height Inc. Term.	28.8 cm	11.3"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

### Cycle Life vs. Depth of Discharge

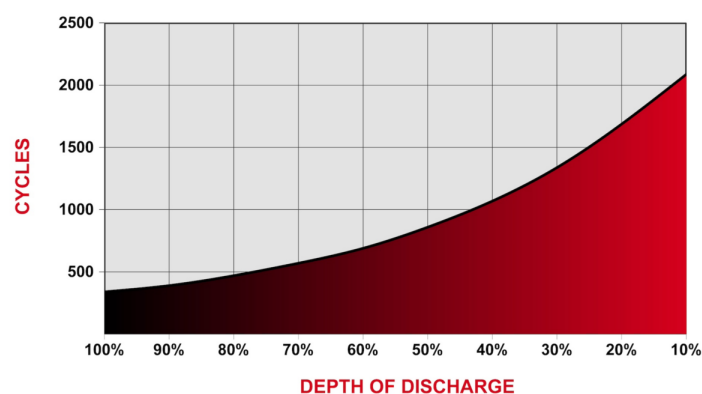

### Detailed Illustration

