



Series	AGM-S	Warranty	See Warranty Terms
Volts	12	Design	22NF
Cells	6		
Terminal Type		F11(M6)	
Included Hardware		M6 stainless bolts & washers	
Size & Thread		M6	

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	11 A
Maximum Charge Current	16 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	7 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	360						
Hour Rate	Capacity / AMP Hour			Current / AMPS			
@ 20 Hour Rate	58 AH			2.9 A			
@ 10 Hour Rate	55 AH			5.5 A			
@ 5 Hour Rate	48 AH			9.6 A			
Cut Off Voltage	Constant Current Discharge						
1.75 VPC	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
	30.55	18.11	14.2	11.26	9.61	6.7	5.57

Specifications


Weight	16.5 kg	36.5 lbs
Length	230 mm	9.05"
Width	138 mm	5.43"
Height Incl. Term.	215 mm	8.46"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

- Plastics are UL94 HB (UL94 V0 available)
- Valve regulated design with integral flame arrestor
- Non-hazardous, Non-spillable

Cycle Life vs. Depth of Discharge

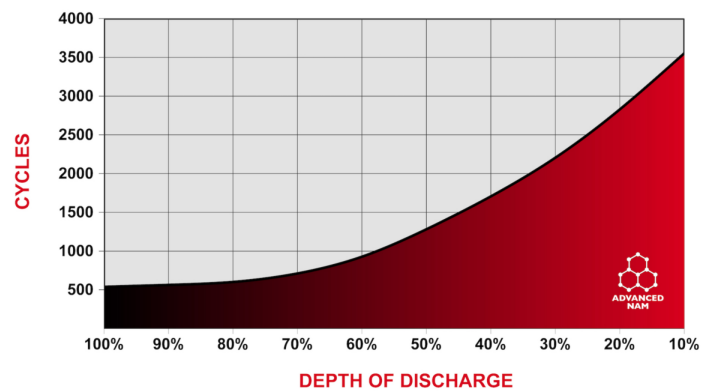

Capacity vs. Temperature

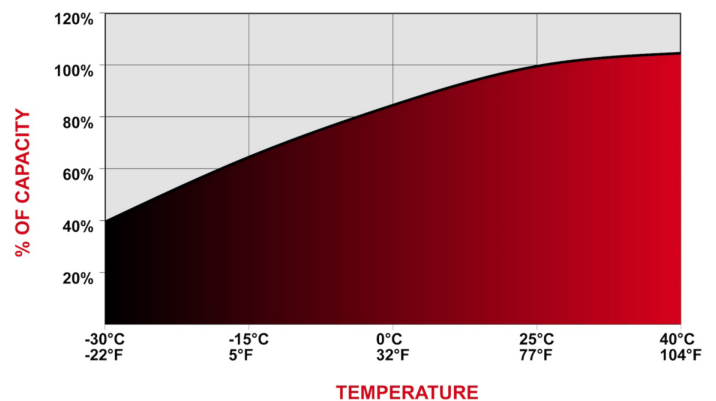

Detailed Illustration

