



Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	Grp 24
Cells	6		
Terminal Type	F12(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	15 A
Maximum Charge Current	25 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5.5 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	500
Marine Crank Amps (MCA) 32°F / 0°C	800
Reserve Capacity (RC @ 25A)	155 Minutes
Reserve Capacity (RC @ 75A)	34 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	95 AH	0.95 A
@ 20 Hour Rate	85 AH	4.25 A
@ 10 Hour Rate	77 AH	7.7 A
@ 5 Hour Rate	70 AH	14 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	43.8	25.6	19.2	13.9	9.2	7.7


Specifications

	Weight	23 kg	50.5 lbs
	Length	26 cm	10.24"
	Width	16.9 cm	6.65"
	Height Inc. Term.	21.5 cm	8.46"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

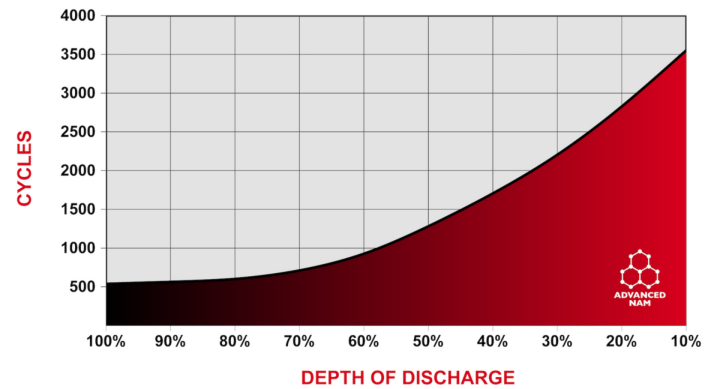

Capacity vs. Temperature

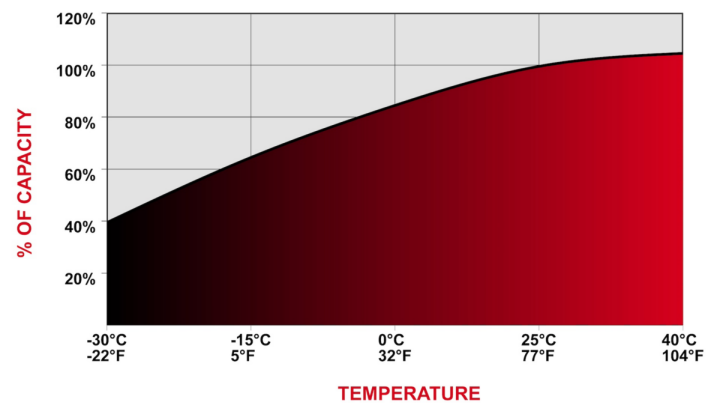

ISO 9001



ISO 14001



OHSAS 18001



MH 28539

