



Series	GEL	Warranty	See Warranty Terms
Volts	2	BCI	2V OPzV
Cells	1		
Terminal Type	F10		
Included Hardware	Threaded Insert & Bolt		

### Charge

Recommended Charge Current	120 A
Maximum Charge Current	360 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.24 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>1938 AH</b>	<b>19.38 A</b>
@ 20 Hour Rate	<b>1571 AH</b>	<b>78.55 A</b>
@ 10 Hour Rate	<b>1380 AH</b>	<b>138 A</b>


### Specifications

	Weight	95 kg	209.5 lbs
	Length	27.5 cm	10.83"
	Width	21 cm	8.27"
	Height Inc. Term.	67.3 cm	26.5"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

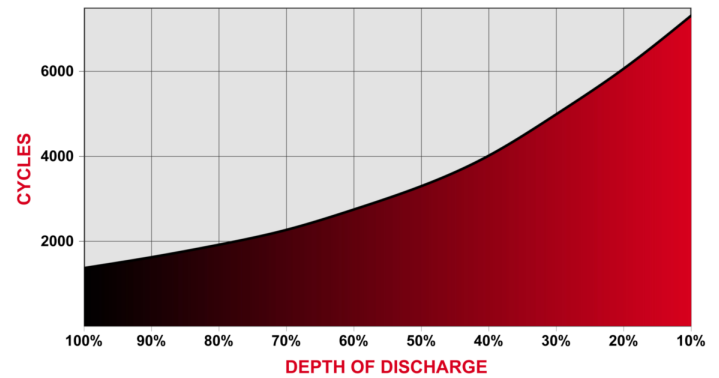

### Capacity vs. Temperature

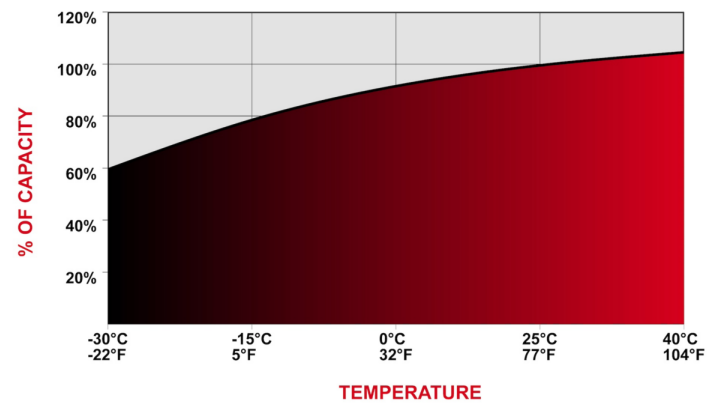

ISO 9001

ISO 14001

OHSAS 18001

MH 28539