



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type		M10	
Included Hardware		Stainless Steel Nuts & Bolts	

### Charge

Recommended Charge Current	325 A
Maximum Charge Current	975 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.1 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>4730 AH</b>	<b>47.3 A</b>
@ 20 Hour Rate	<b>3936 AH</b>	<b>196.8 A</b>
@ 10 Hour Rate	<b>3458 AH</b>	<b>345.8 A</b>


### Specifications

Weight	241.5 kg	532.5 lbs
Length	576 mm	22.68"
Width	212 mm	8.35"
Height Incl. Term.	799 mm	31.46"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

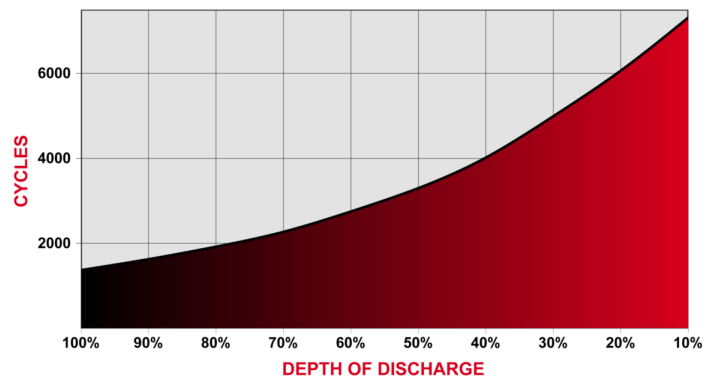

### Capacity vs. Temperature

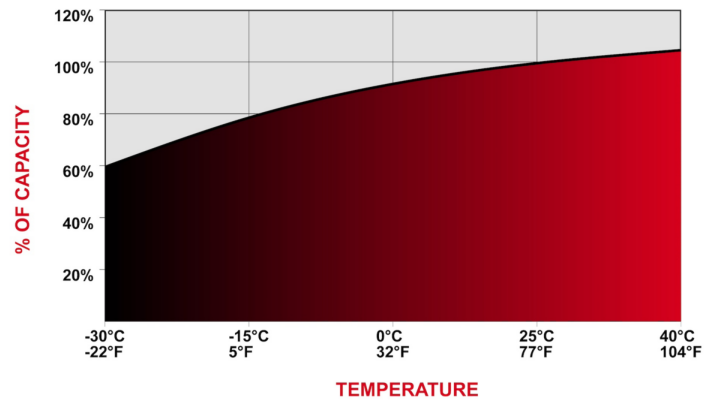

Designed in compliance with applicable BCI, DIN, BS & IEC standards.  
Tested in compliance to BCI & IEC standards.

