



Series	4000	Warranty	3 Years
Volts	6	BCI	GC2
Cells	3	Plates/Cell	15
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)		
Float Voltage Range	2.25 V/cell @ 25°C (77°F)		
Recommended Charge Current	25 A		
Maximum Charge Current	40 A		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	547			
Marine Crank Amps (MCA) 32°F / 0°C	684			
Reserve Capacity (RC @ 25A)	406 Minutes			
Reserve Capacity (RC @ 75A)	107 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	269 AH	2.69 A
@ 72 Hour Rate	265 AH	3.68 A
@ 50 Hour Rate	250 AH	5 A
@ 20 Hour Rate	210 AH	10.5 A
@ 15 Hour Rate	200 AH	13.3 A
@ 10 Hour Rate	185 AH	18.48 A
@ 8 Hour Rate	181 AH	22.58 A
@ 5 Hour Rate	166 AH	33.18 A
@ 1 Hour Rate	84 AH	84 A


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	28 kg	61.5 lbs
	Length	25.9 cm	10.19"
	Width	18.1 cm	7.13"
	Height Inc. Term.	27.9 cm	11"
Electrolyte Reserve	57 mm	2.25"	
Container	Polypropylene		
Cover	Polypropylene		
Handles	Top Molded Strap Brackets		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Cycle Life vs. Depth of Discharge

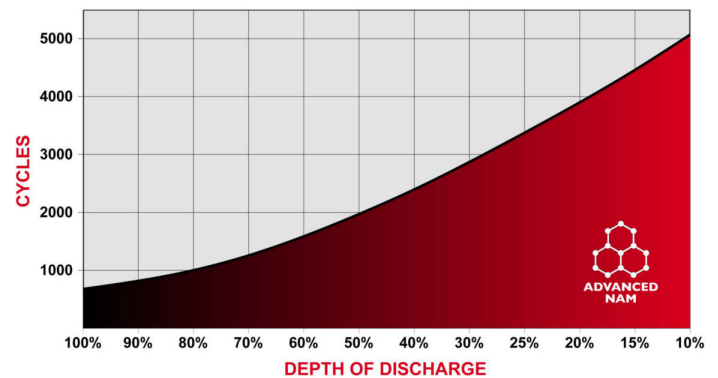

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

