
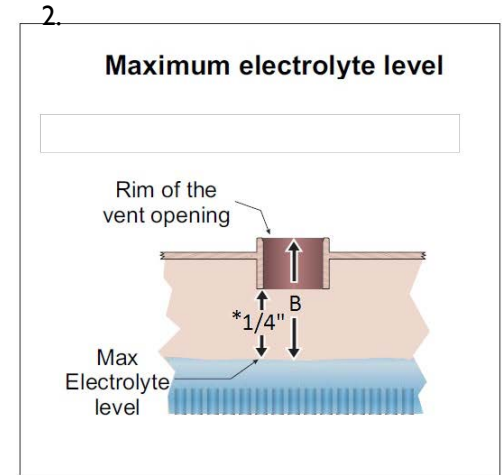


\* Please note that maximum electrolyte level for all flooded models is .64cm | .25" below vent well as indicated in Diagram 2.

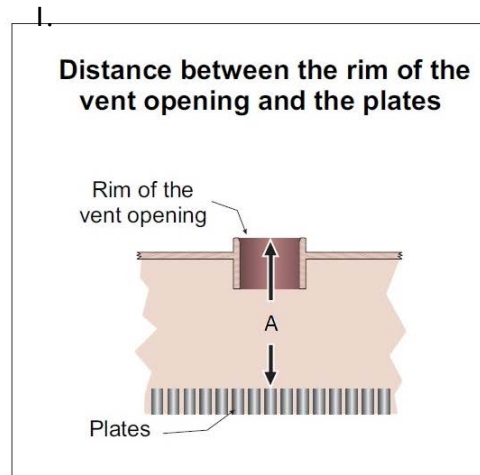

| SERIES | MODEL       | TOP OF VENT TO PLATES (A) | TOP OF VENT TO MAX ELECTROLYTE LEVEL (B) | LIQUID RESERVE (A-B) |
|--------|-------------|---------------------------|--|----------------------|
| 4000   | S2 L16      | 10.16cm   4"              | 4.45cm   1.75"                           | 5.72cm   2.25"       |
| 4000   | S2 L16-HC   |                           |  |                      |
| 4000   | S2 L16-SC   |                           |  |                      |
| 4000   | S6 L16      | 8.26cm   3.25"            | 3.18cm   1.25"                           | 5.08cm   2"          |
| 4000   | S6 L16-HC   |                           |  |                      |
| 4000   | S6 L16-SC   |                           |  |                      |
| 4000   | S6 L16-CAL  |                           |  |                      |
| 4000   | S6 GC2      | 6.03cm   2.375"           | 3.18cm   1.25"                           | 2.86cm   1.125"      |
| 4000   | 6 FS GC     |                           |  |                      |
| 4000   | S6 GC2-HC   |                           |  |                      |
| 4000   | 6 FS GC-HC  |                           |  |                      |
| 4000   | 6 FS GC-SC  |                           |  |                      |
| 4000   | S6 145      | 6.03cm   2.375"           | 3.18cm   1.25"                           | 2.86cm   1.125"      |
| 4000   | 6 FS 145    |                           |  |                      |
| 4000   | 6 FS GC-DIN | 6.03cm   2.375"           | 3.18cm   1.25"                           | 2.86cm   1.125"      |
| 4000   | S6 250      | 6.35cm   2.5"             | 3.18cm   1.25"                           | 3.18cm   1.25"       |
| 4000   | 6 FS 250-SC |                           |  |                      |
| 4000   | S6 305      | 7.62cm   3"               | 3.18cm   1.25"                           | 4.45cm   1.75"       |
| 4000   | 6 FS 305-HC |                           |  |                      |
| 4000   | 6 FS 305-SC |                           |  |                      |
| 4000   | 6 FS L16    | 8.26cm   3.25"            | 3.18cm   1.25"                           | 5.08cm   2"          |
| 4000   | 6 FS L16-HC |                           |  |                      |
| 4000   | 6 HHG 15DP  | 5.4cm   2.125"            | 2.54cm   1"                              | 2.86cm   1.125"      |
| 4000   | 6 HHG 31P   | 9.53cm   3.75"            | 6.35cm   2.5"                            | 3.18cm   1.25"       |
| 4000   | 8 HHG 21P   |                           |  |                      |
| 4000   | 8 HHG 25P   |                           |  |                      |
| 4000   | 8 HHG 29P   |                           |  |                      |
| 4000   | 8 HHG 31P   |                           |  |                      |
| 4000   | 6 EHG 31P   | 10.48cm   4.125"          | 6.35cm   2.5"                            | 4.13cm   1.625"      |
| 4000   | 8 EHG 31P   |                           |  |                      |
| 4000   | 8 FS GC     | 6.35cm   2.5"             | 3.18cm   1.25"                           | 3.18cm   1.25"       |
| 4000   | 8 FS GC-HC  |                           |  |                      |
| 4000   | 8 M 23P     | 11.43cm   4.5"            | 6.35cm   2.5"                            | 5.08cm   2"          |
| 4000   | S12 GC      | 6.98cm   2.75"            | 3.18cm   1.5"                            | 3.18cm   1.25"       |
| 4000   | 12 FS GC-HC |                           |  |                      |

| SERIES | MODEL        | TOP OF VENT TO PLATES (A) | TOP OF VENT TO MAX ELECTROLYTE LEVEL (B) | LIQUID RESERVE (A-B) |
|--------|--------------|---------------------------|--|----------------------|
| 4000   | S12 185      | 8.26cm   3.25"            | 3.18cm   1.25"                           | 5.08cm   2"          |
| 4000   | 12 FS 185-HC |                           |  |                      |
| 4000   | 12 HHG 185P  | 4.76cm   1.875"           | 4.13cm   1.625"                          | .64cm   .25"         |
| 4000   | 12 EHG 210P  | 4.45cm   1.75"            | 3.18cm   1.25"                           | 1.27cm   .5"         |
| 4000   | 12 HHG 325P  | 6.03cm   2.375"           | 3.18cm   1.25"                           | 2.86cm   1.125"      |
| 4000   | 12 EHG 375P  | 6.35cm   2.5"             | 3.18cm   1.25"                           | 3.18cm   1.25"       |
| 4000   | 12 MD 325P   | 6.03cm   2.375"           | 3.18cm   1.25"                           | 2.86cm   1.125"      |
| 4000   | 12 MD 375P   | 6.35cm   2.5"             | 3.18cm   1.25"                           | 3.18cm   1.25"       |
| 4500   | S2 L16-EX    | 10.16cm   4"              | 4.45cm   1.75"                           | 5.72cm   2.25"       |
| 4500   | S6 L16-EX    | 8.26cm   3.25"            | 3.18cm   1.25"                           | 5.08cm   2"          |
| 5000   | 2 OS 33P     | 10.80cm   4.25"           | 6.35cm   2.5"                            | 4.45cm   1.75"       |
| 5000   | 2 YS 27P     | 12.70cm   5"              | 7.62cm   3"                              | 5.08cm   2"          |
| 5000   | 2 YS 31P     |                           |  |                      |
| 5000   | 2 YS 62P     |                           |  |                      |
| 5000   | 2 KS 33P     | 10.80cm   4.5"            | 6.35cm   2.5"                            | 4.45cm   1.75"       |
| 5000   | 4 KS 21P     |                           |  |                      |
| 5000   | 4 KS 25P     |                           |  |                      |
| 5000   | 4 KS 27P     |                           |  |                      |
| 5000   | 4 CS 17P     | 11.43cm   4.5"            | 6.35cm   2.5"                            | 5.08cm   2"          |
| 5000   | 6 CS 17P     |                           |  |                      |
| 5000   | 6 CS 21P     |                           |  |                      |
| 5000   | 6 CS 25P     |                           |  |                      |
| 5000   | 6 CS 27P     |                           |  |                      |
| 5000   | 8 CS 17P     |                           |  |                      |
| 5000   | 8 CS 25P     | 17.15cm   6.75"           | 6.35cm   2.5"                            | 10.80cm   4.25"      |
| 5000   | 8 CS 27P     |                           |  |                      |
| 5000   | 8 NS 23P     |                           |  |                      |
| 5000   | 8 NS 33P     | 12.07cm   4.75"           | 6.35cm   2.5"                            | 5.72cm   2.25"       |
| 5000   | 4 CH 23P     |                           |  |                      |
| 5000   | 8 CH 23P     | 11.43cm   4.5"            | 6.35cm   2.5"                            | 5.08cm   2"          |
| 5000   | 8 CH 33P     |                           |  |                      |
| 5000   | 12 CS 11P    | 14.92cm   5.875"          | 6.35cm   2.5"                            | 8.57cm   3.375"      |
| 5000   | 16 CH 25P    |                           |  |                      |
| 5000   | 16 CH 33P    |                           |  |                      |
| 5000   | 16 CH 35P    |                           |  |                      |