

Rolls

FLOODED DEEP CYCLE BATTERIES

24 M 85

12 VOLTS

CONTAINER:	Polypropylene
COVER:	Polypropylene
TERMINALS:	Universal terminal
HANDLES:	Integrated top cover

WEIGHT DRY:	16 kg	35 Lbs.
WEIGHT WET:	21 kg	46 Lbs.
LENGTH:	276 mm	11 Inches
WIDTH:	171 mm	6 3/4 Inches
HEIGHT:	238 mm	9 3/8 Inches

6 Cell




COLD CRANK AMPS (CCA):	0°F / -17.8°C	500
MARINE CRANK AMPS (MCA):	32°F / 0°C	625
RESERVE CAPACITY (RC @ 25A):		135 Minutes

CAPACITY 85 AH

HOUR RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	106	1.06
@ 20 HOUR RATE	1.280	85	4.25
@ 15 HOUR RATE	1.280	80	5.33
@ 12 HOUR RATE	1.280	76	6.33
@ 10 HOUR RATE	1.280	72	7.20
@ 8 HOUR RATE	1.280	71	8.88
@ 6 HOUR RATE	1.280	70	11.67
@ 5 HOUR RATE	1.280	69	13.80
@ 4 HOUR RATE	1.280	55	13.75
@ 3 HOUR RATE	1.280	50	16.67
@ 2 HOUR RATE	1.280	43	21.50
@ 1 HOUR RATE	1.280	31	31.00

CYCLE LIFE VS. DEPTH OF DISCHARGE

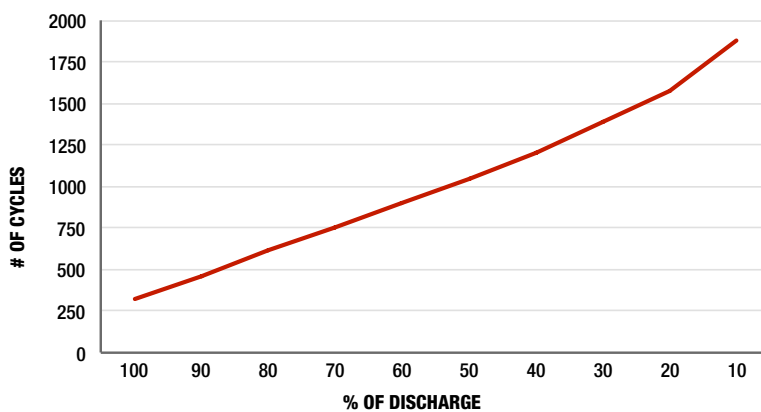

VOLTAGE VS. DEPTH OF DISCHARGE

